

Modular Portable Data Logging and Alarming System

OMP-MODL



- ✓ **Modular Design Allows Flexibility to Meet Your Application Requirements**
- ✓ **Fully User Programmable Via Graphic Drag-and-Drop Icons**
- ✓ **Expandable to 24 Universal Analog Inputs**
- ✓ **Accepts Thermocouple, Voltage, Current, Frequency, RTD, Thermistor and Resistance Inputs**
- ✓ **Up to 48 Digital Inputs/Alarm Outputs**
- ✓ **One High-Speed Counter/Event Input**
- ✓ **Conditional Logging, Math, Integrals, Delta Logging and Much More**
- ✓ **Low Power for Battery or Line Powered Use**
- ✓ **Full Differential, Bipolar Inputs**
- ✓ **Modem Option with Pager Alarm Output**
- ✓ **Real-Time Trending to a PC Via Modem or RS-232 Link**
- ✓ **16,000 Sample Capacity (up to 400,000 When Using PCMCIA Memory Card)**
- ✓ **Provided Complete with HyperWare Windows Software**

The OMP-MODL Modulogger is a self-contained, battery or line-powered data logger and alarm system, which can be deployed as a “stand-alone” system, or incorporated into equipment where it silently samples digital and analog inputs, storing them to internal or PCMCIA memory. Easily programmed, the OMP-MODL has extremely powerful processing capabilities for data reduction (averaging, min/max, etc.) mathematical manipulation (algebraic, trig, time integrals, etc.) as well as unlimited, user-programmable, intelligent data logging capabilities. Together with the supplied Hyperware for Windows® software, the OMP-MODL is a powerful, fully

user programmable datalogging and alarming system. The Hyperware software provides for graphical programming of the OMP-MODL, serial communications, real-time trending, plotting and spreadsheet conversion of collected data. The OMP-MODL consists of a user specified stack of ruggedly packaged, rectangular modules. The main CPU module can be expanded with additional analog inputs, digital I/O, display and memory expansion modules to meet your specific application needs.

CPU Module

A CPU module is required in all OMP-MODL systems as it contains the system microprocessor, data storage memory, 13 bit Analog to Digital converter basic user switches and indicators, RS232 port and Cold Junction Compensation circuitry. It also includes four alarm outputs, four universal analog inputs, and one digital count/event input. The provided analog inputs are software configurable for 6 thermocouple types, 15 ranges of DC voltage or 7 ranges of DC current (identical function/specs as add-on OMP-MLIM-1 Module). Each of the analog input channels sports full differential inputs, software programmable configuration, front-end completion circuitry and rugged suppression protection circuitry to insure reliable accurate readings. The CPU module also includes a Cold Junction Compensation input for thermocouple applications. If thermocouples are not used, the CJC channel can be used as a system temperature, resistance, thermistor, or contact closure input. A single software configurable, general-purpose digital input is provided for logging of events or counting pulse outputs from flow meters, encoders, or other pulse-train type sources.



Modulogger Expanded View

The CPU module also provides two isolated alarm relay outputs, a TTL alarm output, a Status LED and a regulated, current-limited 5 Vdc output, all controllable via software. “Enable”, “Stop” and “Reset” switches as well as LED status indicators are provided at one end of the CPU module. Input and Output wiring is handled through plug-in terminal strips which allow for mass connection and disconnection of wiring.

Expansion Modules

A full family of plug-on modules is available to expand the capability and features of the system. Modules are available for additional analog inputs, digital I/O, modem communication, PCMCIA memory card interface, user interface/display, and battery power. As modules are added, they stack onto the CPU module, building a layered instrument


to meet your needs. Modules are self-identifying and configurable via the Hyperware software for input type and range within the module's capability (e.g., the MLIM-4 accepts 2, 3, and 4 wire RTD, resistance and thermistor inputs each with a multitude of ranges, all under software control).

Applications


Designed for portable, plant floor, and long-term remote data collection applications, the OMP-MODL incorporates low power CMOS circuitry to provide up to 4 weeks of operation from its optional plug-on D-cell battery pack. A low-voltage power transformer can be used for indefinite logging.

Software


HyperWare for Windows is a powerful multi-purpose software package provided with the OMP-MODL. It facilitates serial communications, provides for graphic programming of the OMP-MODL, real-time data trending, collected data graphic plotting and data export to other applications, such as Microsoft Excel.

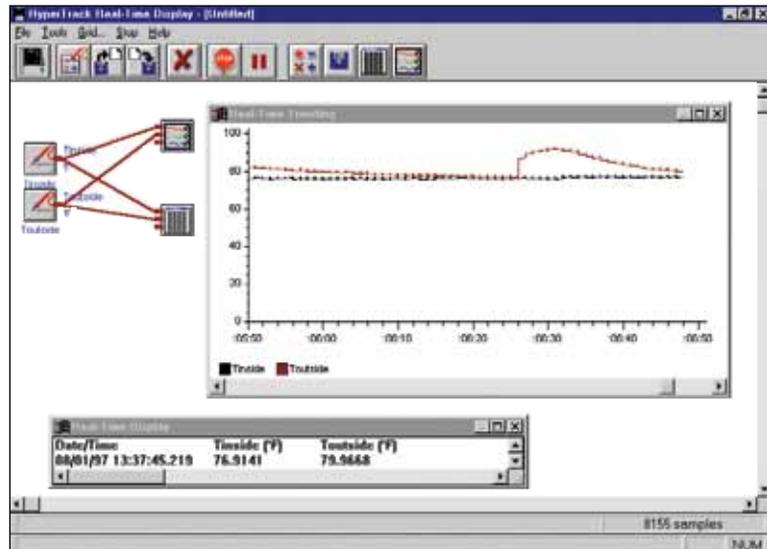

Real Time Trending

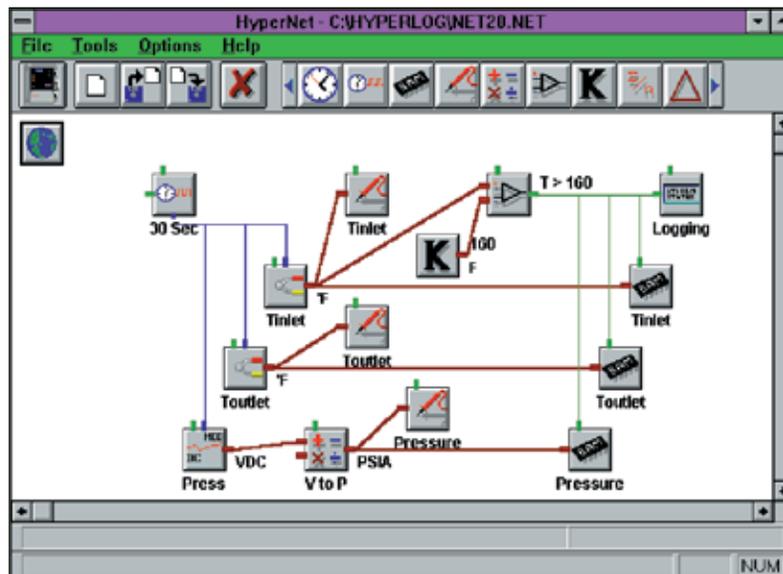

Drag and Drop Graphics Programming

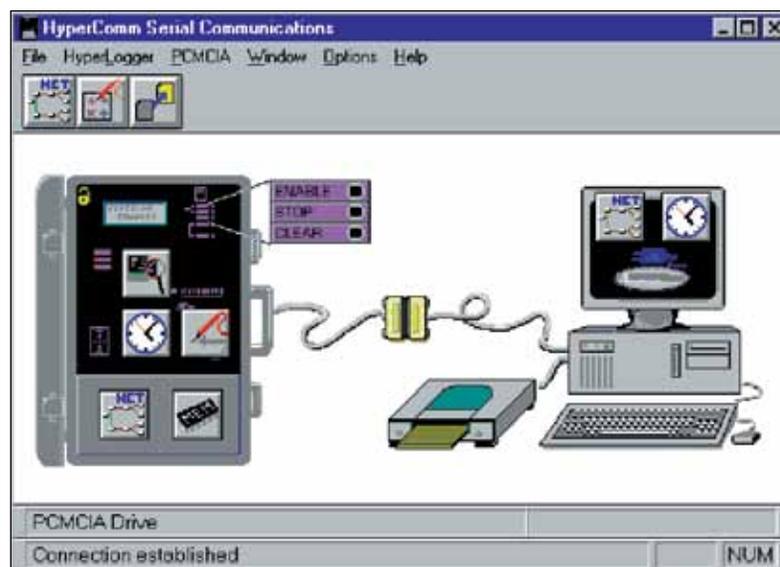

Graphic RS-232/Modem Communications

Specifications

Data Storage Memory: Redundant battery backed up SRAM; Approx. 16,000 samples for OMP-MODL and up to 80,000 with OMP-MNL-EXM; Up to 500,000 reading when using PCMCIA memory cards

Data Memory Backup: Lithium cell, 1 year @ 25°C

Memory Utilization: User programmable; Stops either when memory is full, or rotary (FIFO)

A/D Converter: 12-bit plus sign (13 bit) SAR converter; Programmable first-order filtering and 50/60 Hz noise rejection options

A/D Converter Accuracy: $\pm 0.1\%$ RDG + 1 bit

Sampling Throughput Rate: 150 samples per second max. (analog input to memory); rate is dependent on number and type of channels and programmed signal processing; Sampling rates are configurable for each channel

Digital Input: One general purpose digital input channel. User programmable for event or high-speed counter applications. Contact closure or TTL driven signal input (15 Vdc max)

Outputs: 2 low voltage N.O. relays, 500 mA rated; 1 current limited TTL digital output; 100 mA @ 5 Vdc regulated output (short circuit protected)

Real-Time Clock: Date and time, 24 hour battery backed up

Glitch Recovery: Hardware watchdog reset followed by software restart of last operation

Power Consumption: 9 Vdc nominal. Approx. 5 mA between readings, approx. 50 mA during readings provided by optional battery pack (6 internal D-cells)

External Power: Terminal strip connection for external power source. Accepts 10-32 Vdc or 10-26 Vac from any semi-regulated external source (120 Vac wall adapter is included with OMP-MNL), Fuse and Transzorb protected

Operating Temperature/Humidity: -10 to 60°C (14 to 140°F), 90% RH non-condensing

Mechanical: Dust sealed. 8.8 W x 4.8 H x 2.2" D (3.8" H with battery pack attached) 1.5 lb. (3 lb. with battery pack)

Expansion Modules: Modular design allows flexibility to meet your specific application requirements. The following modules may be mixed and matched (5 modules can be attached).

Cold Junction Compensation Range (CJC): -10 to 60°C (14 to 140°F)

DC VOLTAGE INPUTS

Full Scale Ranges: ± 20 mV, ± 40 mV, ± 50 mV, ± 60 mV, ± 100 mV, ± 200 mV, ± 1 V, ± 2 V, ± 5 V, ± 10 V, ± 30 V

Accuracy: $\pm 0.5\%$ F.S. for ± 10 V and $+30$ V range. All other ranges $\pm 0.3\%$ F.S.

Common Mode Range: 3.5 Vdc, full differential inputs.

Input Resistance: >2.5 M for 5, 10, and 30 Vdc; >10 M for all other ranges.

DC CURRENT INPUTS

Full Scale Ranges: ± 200 μ A, ± 400 μ A, ± 500 μ A, ± 1 mA, ± 2 mA, ± 11 mA, ± 22 mA

Accuracy: $\pm 0.3\%$ F.S.

Input Resistance: 100 Ω (all current ranges)

OMP-MLIM-2, 4 INPUT/4 OUTPUT COUNTER/TIMER/EVENT INTERFACE MODULE

Provides 4 individually programmable channels of digital signal input and 4 outputs. Any combination of the following input types can be configured on a module:

Frequency: 5 Hz to 30 KHz, 300 mV p-p minimum input amplitude, 15 V p-p maximum

Event: Contact closure or TTL input (0 to 15 Vdc max). 1 second resolution (or 5 msec in millisecond mode). Software controlled 50 msec debounce option

Counter: Contact closure or TTL input (0 to 15 Vdc max), 20 KHz maximum input frequency, Software controlled 50 msec debounce option, 16 million maximum accumulated counts between reads

Digital Outputs: (4 separate channels): Low output = tri-state (floating); High output = 4.0 Vdc @ 1 mA, 3.2 Vdc @ 10 mA. Short circuit protected; Max current = 12 mA (approx.) per channel

OMP-MLIM-8, 8 CHANNEL DIGITAL I/O INTERFACE MODULE

Eight channel digital I/O allows for user configuration of 8 channels as inputs or outputs (individually selectable)

Input Signal: Contact closure or TTL input (0 to 26 Vdc max). 1 second resolution (or 5 msec in millisecond mode), Software controlled 50 msec debounce option

Output Signal: Low output = tri-state (floating); High output = 4.0 Vdc @ 3 mA, short circuit protected; Max current = 3 mA (approx.) per channel

OMP-MLIM-4, 4 CHANNEL RTD/THERMISTOR/RESISTANCE INTERFACE MODULE

Measures any combination of the following input types:

RTD

Type: 100 Ω and 1000 Ω
 $\alpha = 0.00385$ and 0.00392

Ranges: -200 to 850°C and -200 to 300°C

Accuracy: $\pm 0.1^\circ\text{C}$ to 0.4°C depending on range and wiring configuration

Configurations Supported: 2-wire, 3-wire, and 4-wire, (3 and 4 wire configurations use 2 input channels)

THERMISTOR

Thermistor Type: 10k @ 25°C (Fenwall #16 or equivalent)

Ranges: -32 to 180°C; -4 to 180°C; 10 to 180°C; 25 to 180°C

Accuracy: $\pm 0.2^\circ\text{C}$ to $\pm 0.5^\circ\text{C}$ depending on range

RESISTANCE

Ranges: 12 ranges, from 200 Ω Full Scale to 400,000 Ω Full Scale

Accuracy: ± 0.1 to $\pm 0.3\%$ of Rdg. Depending on range and wiring configuration

Configurations Supported: 2-wire, 3-wire, and 4-wire (3 and 4 wire configurations use 2 input channels)

Thermocouple Input Ranges

Thermocouple		Maximum Range		Accuracy*	
J	Iron-Constantan	0 to 760°C	32 to 1400°F	±1°C	±1.8°F
K	CHROMECA®-ALOMEGA®	0 to 1370°C	32 to 2498°F	±1.2°C	±2.2°F
E	CHROMECA®-Constantan	-100 to 1000°C	-148 to 1832°F	±1°C	±1.8°F
T	Copper-Constantan	-160 to 400°C	-256 to 752°F	±1°C	±1.8°F
R	Pt/13%Rh-Pt	0 to 1000°C	32 to 1832°F	±10°C	±18°F
S	Pt/10%Rh-Pt	0 to 1750°C	32 to 3182°F	±10°C	±18°F

* Plus ±0.5°C CJC accuracy

To Order	
Model Number	Description
OMP-MODL*	Portable data logging system with 16,000 reading memory with 4 universal analog inputs, one digital input and 4 discrete outputs. Includes Hyperware software, serial cable, AC adapter and user manual
OMP-MODL-EXM*	Portable data logging system with 80,000 reading memory with 4 universal analog inputs, one digital input and 4 discrete outputs. Includes Hyperware software, serial cable, AC adapter and user manual
OMP-MODL-OEM	Portable data logger with 16,000 reading memory with 4 universal analog inputs, one digital input and 4 discrete outputs. Does not include software, cables, AC adapter or user manual
OMP-MODL-EXM-OEM	Portable data logger with 80,000 reading memory with 4 universal analog inputs, one digital input and 4 discrete outputs. Does not include software, cables, AC adapter or user manual

*Note: OMP-MODL-TOP and OMP-MODL-BACK are required if not using the OMP-DISP and OMP-MNL-BATT. See Options and Accessories.

Ordering Example: OMP-MODL portable data logging system with OMP-MNL-BATT and OCW-1 OMEGACARESM 1 year extends standard 1 year warranty for total of 2 years.

Options and Accessories

Model Number	Description
OMP-ML-DISP-MDL	Display Module with 2 line x 16 character LCD and front panel user switches
OMP-MLIM-1	Analog interface module; 4 channels of thermocouple, DC voltage and/or DC current inputs (individually selectable)
OMP-MLIM-2	Digital interface module; 4 channels of frequency, event, and/or count input (individually selectable), plus 4 digital outputs
OMP-MLIM-4	Resistance interface module; 4 channels of RTD, thermistor and/or resistance inputs (individually selectable)
OMP-MLIM-5	PCMCIA interface module; includes socket for SRAM memory cards (requires PCMCIA SRAM card)
OMP-MLIM-8	Digital I/O interface module; 8 channels, individually configurable as inputs (contact closure or TTL) or outputs (0-4 V @ 3 mA)
OMP-MODL-TOP	Top cover plate (required if OMP-DISP is not used)
OMP-MODL-BACK	Back cover/mounting plate (required if OMP-MNL-BATT is not used)
OMP-MLIM-5-144	Modem/PCMCIA interface module; includes 14400 baud modem and socket for SRAM memory cards (requires PCMCIA SRAM card)
OM-320-MC-50*	PCMCIA SRAM memory card - approx. 65,000 samples (requires any OMP-MLIM-5 interface modules)
OM-320-MC-200*	PCMCIA SRAM memory card - approx. 250,000 samples (requires any OMP-MLIM-5 interface modules)
OM-320-MC-400*	PCMCIA SRAM memory card - approx. 500,000 samples (requires any OMP-MLIM-5 interface modules)
OM-320-PD-2	PCMCIA drive connects to IBM PC serial port or USB port for reading data from PCMCIA SRAM cards. Includes software drivers.
OMP-MNL-BATT	Battery pack module (with 6 D-Cells). Attaches to OMP-MNL data loggers
OM-220-RPS-1	Rechargeable power supply for sensor excitation and auxiliary logger power. Dual outputs programmable from 3.5 to 22 Vdc
OM-220-CHGR-12	Battery charger for stand-alone charging of batteries when not installed in OM-220-RPS-1 (115 Vac input)

* The number of readings that each PCMCIA can store depends on the types of inputs that you are storing. For example, Digital I/O uses less memory than Analog inputs, so you can store more readings, therefore, the values listed above are approximations.